

# 3

RECEIVED


MAR 4 1994

DOCUMENTS CONTROL

**NOTES:**

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 9 nF-11 nF.
3. DIELECTRIC WITHSTANDING VOLTAGE: 3 kV RATED, 4.5 kV PROCESS @ 100° C FOR 2 HOURS AND 6 kV PROOF FOR 5 SECS.
4. GLASS TAPE OVERWRAP.
5. INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:  
 G103A302A000  
 RI 7W970  
 10NF ±10% 3000WVDC  
 DATE CODE
6. EQUALLY DISTANT WITHIN .285, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .060, BOTH ENDS.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE. ER 588	0304 94	DAC

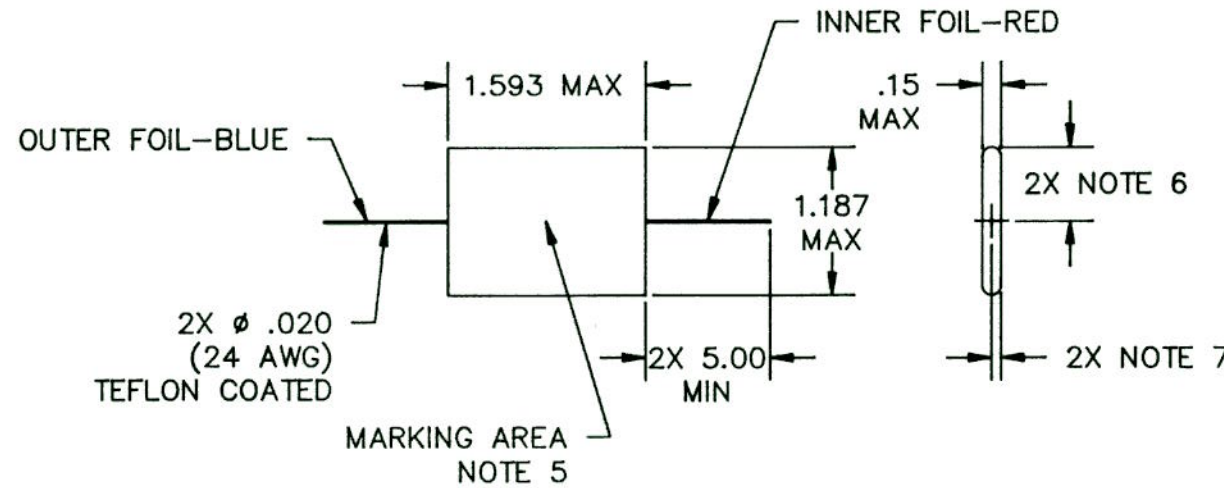

THIS IS A COMPUTER GENERATED DRAWING.  
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR 01-24 94		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK <i>[Signature]</i> 3/1/94		CAPACITOR, FIXED 10 nF ±10% 3000 WVDC	
		MATERIAL		APPR <i>[Signature]</i> 3/1/94		DRAWING NO G103A302A000	
		FINISH		APPR		REV -	
NEXT ASSEMBLY		USED ON		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SCALE: 1 = 1	
APPLICATION						SIZE B	