

5

RECEIVED



DEC 22 1993

DOCUMENTS CONTROL

NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C , 1 KHZ.
2. CAPACITANCE: 18 NF-22 NF.
3. DIELECTRIC WITHSTANDING VOLTAGE: 2 KV RATED, 3 KV PROCESS FOR 2 HOURS @ 100° C AND 4 KV PROOF FOR 5 SECS.
4. GLASS TAPE OVERWRAP.
5. INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:
G203A202A000
RI 7W970
20NF ±10% 2000WVDC
DATE CODE
6. EQUALLY DISTANT WITHIN .134, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .062, BOTH ENDS.
8. DOT INDICATES OUTSIDE FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
A		REVISED PER ECO 368 ER 585	12 20 93	DAC

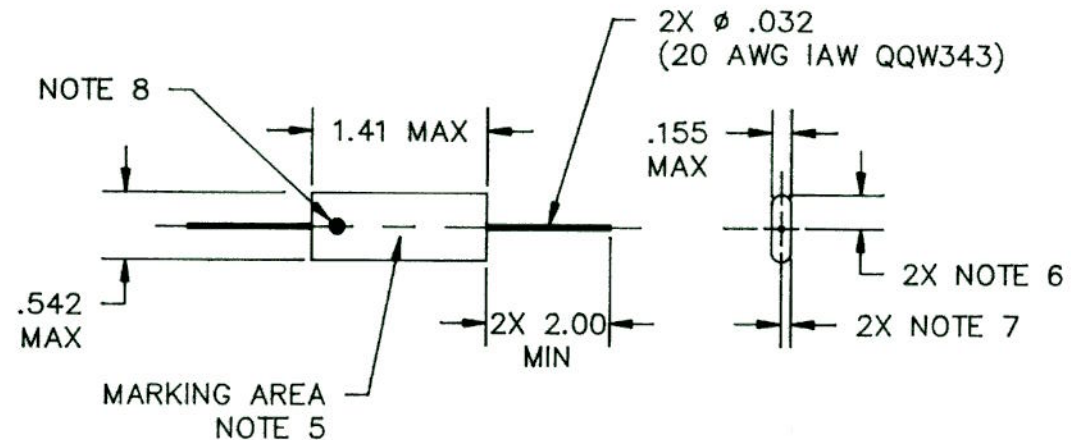

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR 07-08 91		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX± .003		CHECK <i>M Beck</i> 12/14/93		CAPACITOR, FIXED	
		MATERIAL		APPR <i>D. Payne</i> 12/11/93		20 NF ±10%	
		FINISH		APPR		2000 WVDC	
NEXT ASSEMBLY		USED ON		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SIZE B	CODE IDENT 7W970
APPLICATION						DRAWING NO G203A202A000	REV A
						SCALE: 1=1	