



NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 180 nF-220 nF.
3. DIELECTRIC WITHSTANDING VOLTAGE: 2.5 kV RATED, 3.75 kV PROCESS FOR 2 HOURS @ 100° C AND 5 kV PROOF FOR 5 SECS.
4. GLASS TAPE OVERWRAP.
5. INK STAMP THE FOLLOWING WITH BLACK EPOXY INK. CHARACTERS APPROX .10 HIGH:
 G204A252A001
 RI 7W970
 200NF ±10% 2500 WVDC
 DATE CODE
6. EQUALLY DISTANT WITHIN .325, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .20, BOTH ENDS.
8. DOT INDICATES OUTER FOIL.
9. GRIT BLAST FINISH ON END CAP EPOXY.

REVISIONS		DATE	APPRVD
LETTER	NO		
-		0102 95	DAC
INITIAL RELEASE ER 613			

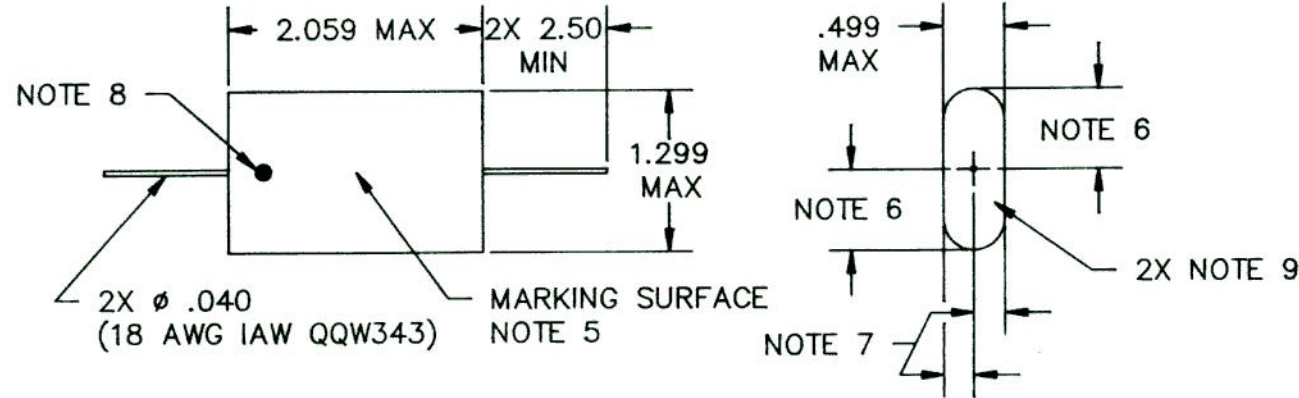

THIS IS A COMPUTER GENERATED DRAWING.
 ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN	D CADENA JR	12-13 95	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455			
			TOLERANCES	CHECK	<i>M. Rab</i>				12/16/95
		FRACTIONS ±	APPR	<i>D. P. G.</i>	2/16/95	CAPACITOR, FIXED 200 nF ±10% 2500 WVDC			
		DECIMALS .XX±	APPR						
		DECIMALS .XXX±	THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.			SIZE	CODE IDENT	DRAWING NO	REV
		MATERIAL				B	7W970	G204A252A001	-
		FINISH	SCALE: 1 = 1						
NEXT ASSEMBLY	USED ON								
APPLICATION									