


5

NOTES:


- DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
- CAPACITANCE: 225 NF-275 NF.
- DIELECTRIC WITHSTANDING VOLTAGE: 3 KV RATED, 4.5 KV PROCESS FOR 2 HOURS @ 100° C AND 6 KV PROOF FOR 5 SECS.
- GLASS TAPE OVERWRAP.
- INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:
G254A302A000
RI 7W970
250NF ±10% 3000WVDC
DATE CODE
- EQUALLY DISTANT WITHIN .443, BOTH ENDS,
- EQUALLY DISTANT WITHIN .126, BOTH ENDS.
- DOT INDICATES OUTSIDE FOIL.

G254A302A000
RI 7W970
250NF ±10% 3000WVDC
DATE CODE



SCHEMATIC

2X ø.040
(18 AWG PER QQW343)

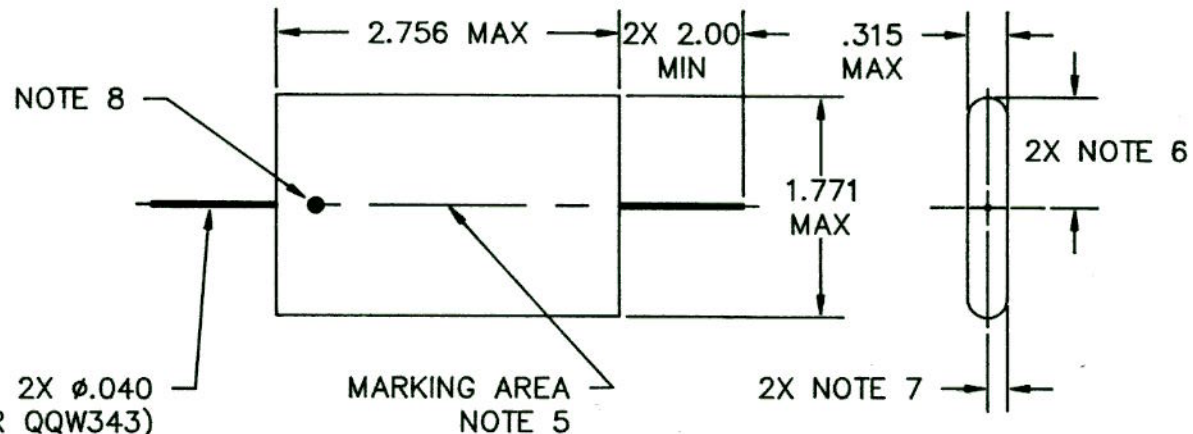

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE. ER 523	07/12/91	DAC

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN	D CADENA JR	07-08 91	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455				
			TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX± .003	CHECK	<i>N. Rak</i>					7/9/91
		MATERIAL	APPR	<i>W. Deering</i>	7/4/91	CAPACITOR, FIXED 250 NF ±10% 3000 WVDC				
			FINISH	THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.						
NEXT ASSEMBLY	USED ON		SIZE	CODE IDENT	DRAWING NO	REV				
APPLICATION			B	7W970	G254A302A000	-				
			SCALE:	1 = 1						