

RECEIVED

AUG 20 1993



DOCUMENTS CONTROL

5

NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 225 nF-275 nF.
3. DIELECTRIC WITHSTANDING VOLTAGE: 4 kV RATED, 6 kV PROCESS FOR 2 HOURS @ 100° AND 8 kV PROOF FOR 5 SECS.
4. GLASS TAPE OVERWRAP.
5. INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:  
G254A402A000  
RI 7W970  
250NF ±10% 4000WVDC  
DATE CODE
6. EQUALLY DISTANT WITHIN .404, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .204, BOTH ENDS.
8. BLACK DOT INDICATES OUTSIDE FOIL.

REVISIONS		DATE	APPRVD
LETTER	NO		
-		0820 93	DAC
INITIAL RELEASE. ER 580			

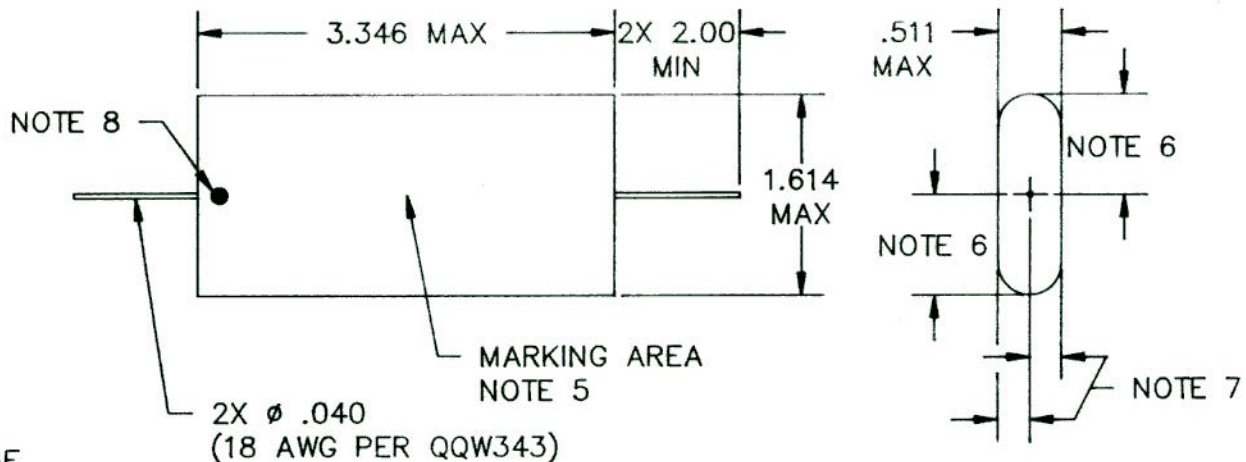

THIS IS A COMPUTER GENERATED DRAWING.  
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR 08-05 93		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX± .003		CHECK <i>N Rak</i> 8/1/93		CAPACITOR, FIXED 250 nF ±10% 4000 WVDC	
		MATERIAL		APPR <i>D J G</i> 8/14/93		DRAWING NO	
		FINISH		APPR		REV	
NEXT ASSEMBLY		USED ON		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		B 7W970 G254A402A000 -	
APPLICATION				SCALE: 1 = 1			