

RECEIVED

FEB 21 2003



DOCUMENT CONTROL

2

NOTES:

- DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
- CAPACITANCE: 450 - 550 nF.
- DIELECTRIC WITHSTANDING VOLTAGE:
4.0 kV RATED
4.2 kV BURN-IN FOR 2 HRS @ 100° C
5.6 kV PROOF FOR 5 SECONDS
- GLASS TAPE OVERWRAP.
- INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:
G504A402R000
RI 7W970
500NF ±10% 4000WVDC
DATE CODE
- INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:
PULSE RATED
TO 5 KV
- BLACK DOT INDICATES OUTER FOIL.
- EQUALLY DISTANT WITHIN .216.

LETTER		NO	DESCRIPTION	DATE	APPRVD
-			INITIAL RELEASE. ER 699	0221 03	DAC

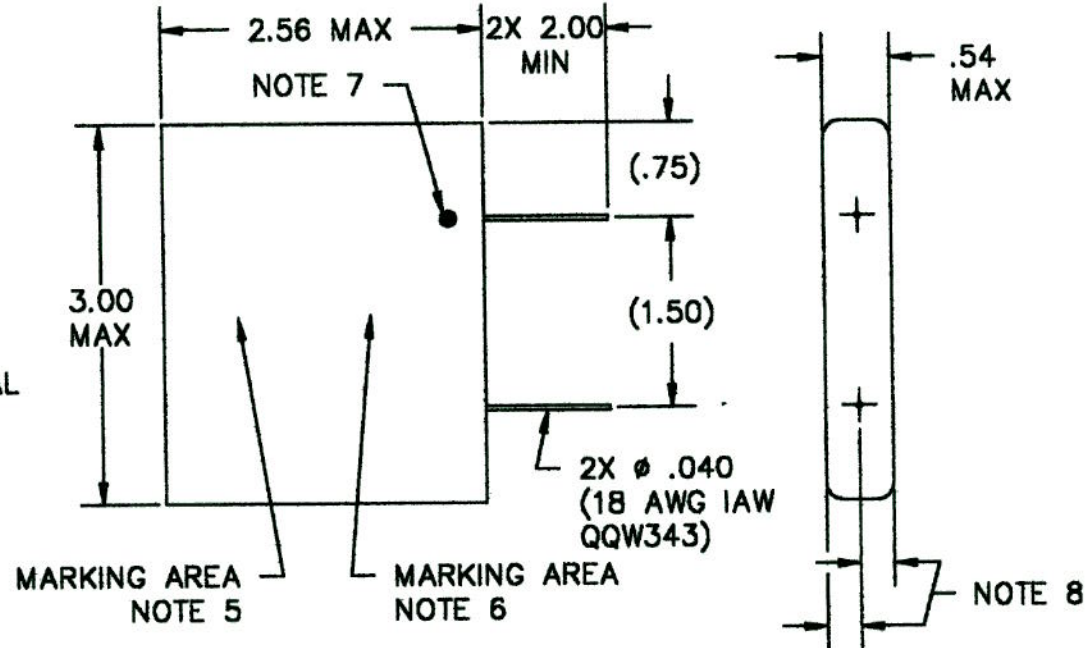

THIS IS A COMPUTER GENERATED DRAWING. ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR. 02-06	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX± .003		CHECK DAC 0210 03	CAPACITOR, RECON MICA 500 nF ±10% 4000 WVDC	
		MATERIAL		APPR R.N. Thomas 2/10/03	SIZE CODE IDENT DRAWING NO REV B 7W970 G504A402R000 -	
		FINISH		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		
NEXT ASSEMBLY	USED ON	APPLICATION		SCALE: 1 = 1		