

# 5

RECEIVED

MAR 30 1998


DOCUMENT CONTROL

NOTES:

1. CAPACITANCE: 9 nF-11 nF.
2. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
3. DIELECTRIC WITHSTANDING VOLTAGE:  
1.2 kV RATED  
1.8 kV BURN-IN FOR 2 HRS @ 100° C  
2.4 kV PROOF FOR 5 SECONDS
4. MYLAR WRAPPED, EPOXY ENDCAPPED.
5. INK STAMP WITH BLACK EPOXY INK:  
M103A122A000  
RI 7W970  
10NF ±10% 1200WVDC  
DATE CODE
6. EQUALLY DISTANT WITHIN .168,  
BOTH ENDS.
7. EQUALLY DISTANT WITHIN .038,  
BOTH ENDS.
8. DOT INDICATES OUTER FOIL.

REVISIONS		DATE	APPRVD
LETTER	NO	DESCRIPTION	
-		INITIAL RELEASE. ER 032	0330 98 DAC

2X Ø.032 TINNED COPPER  
(20 AWG IAW QQW343)

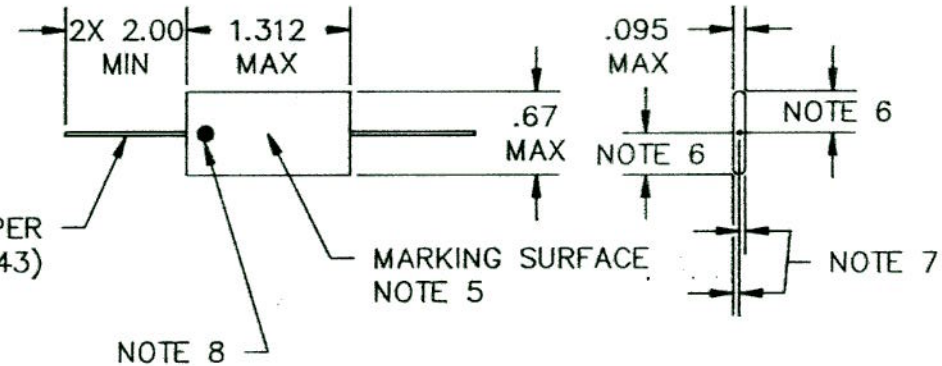

THIS IS A COMPUTER GENERATED DRAWING.  
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN N ROCK	9-4 97	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455			
		TOLERANCES FRACTIONS ±    ANGLES ± DECIMALS .XX± DECIMALS .XXX±	CHECK DAC	0313 98	CAPACITOR, RECON MICA 10 nF ±10% 1200 WVDC			
		MATERIAL	APPR <i>A. R. Kovins</i>	3/13/98	SIZE	CODE IDENT	DRAWING NO	REV
		FINISH	THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		B	7W970	M103A122A000	-
NEXT ASSEMBLY	USED ON				SCALE: 1 = 1			
APPLICATION								