



5 RECEIVED
JUN 24 1999
DOCUMENT CONTROL

NOTES:

1. CAPACITANCE: 90 nF-110 nF.
2. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
3. DIELECTRIC WITHSTANDING VOLTAGE:
 2 kV RATED
 3 kV BURN-IN FOR 2 HRS @ 100° C
 4 kV PROOF FOR 5 SECONDS
4. MYLAR WRAPPED, EPOXY ENCAPPED.
5. INK STAMPING:
 M104A202A000
 RI 7W970
 100NF ±10% 2000WVDC
 DATE CODE
6. EQUALLY DISTANT WITHIN .573, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .08, BOTH ENDS.
8. BLACK DOT INDICATES OUTER FOIL.

REVISIONS			
LETTER	DESCRIPTION	DATE	APPRVD
-	INITIAL RELEASE. ER 645	06/24/99	DAC

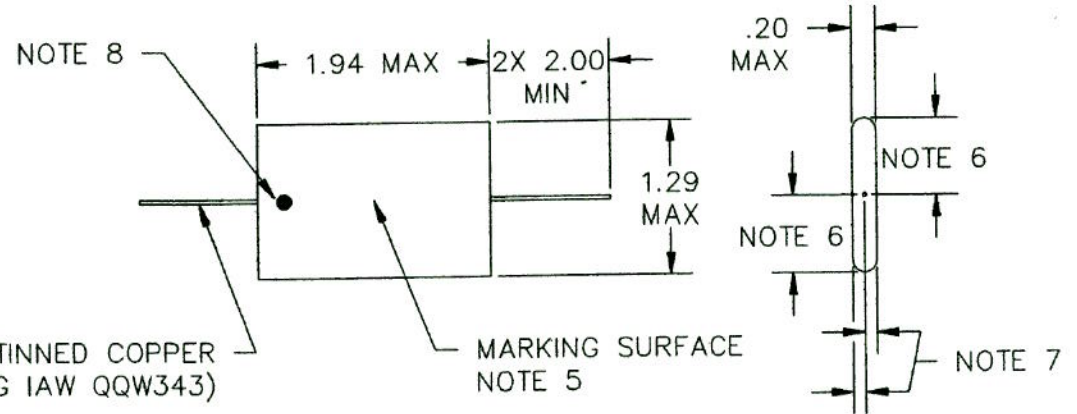

FUNCTIONAL
DIAGRAM

THIS IS A COMPUTER GENERATED DRAWING.
 ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN N ROCK		4-22 99		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455					
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK DAC		06/16/99		CAPACITOR, RECON MICA					
		MATERIAL		APPR A.R. Harny		6/16/99		100 nF ±10%					
		FINISH		APPR				2000 WVDC					
NEXT ASSEMBLY		USED ON		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SIZE		CODE IDENT		DRAWING NO		REV	
APPLICATION						B		7W970		M104A202A000		-	
						SCALE: 1 = 1							