

5


RECEIVED

DEC 22 1993

DOCUMENT CONTROL


NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 45 nF-55 nF EACH.
3. DIELECTRIC WITHSTANDING VOLTAGE: 3.5 KV RATED, 4.25 KV PROCESS FOR 2 HOURS @ 100° C AND 5 KV PROOF FOR 5 SECS.
4. MYLAR TAPE OVERWRAP.
5. TIN COATED NICKEL TABS.
6. INK STAMP THE FOLLOWING WITH BLACK EPOXY INK. CHARACTERS APPROX .06 HIGH:
 M104A352B001
 DATE CODE RI 7W970
 2X 50NF ±10% 3.5KVDC
7. DOT INDICATES OUTER FOIL.



SCHMATIC

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
A		REVISED PER ECO 863 ER 585	1220 93	DAC

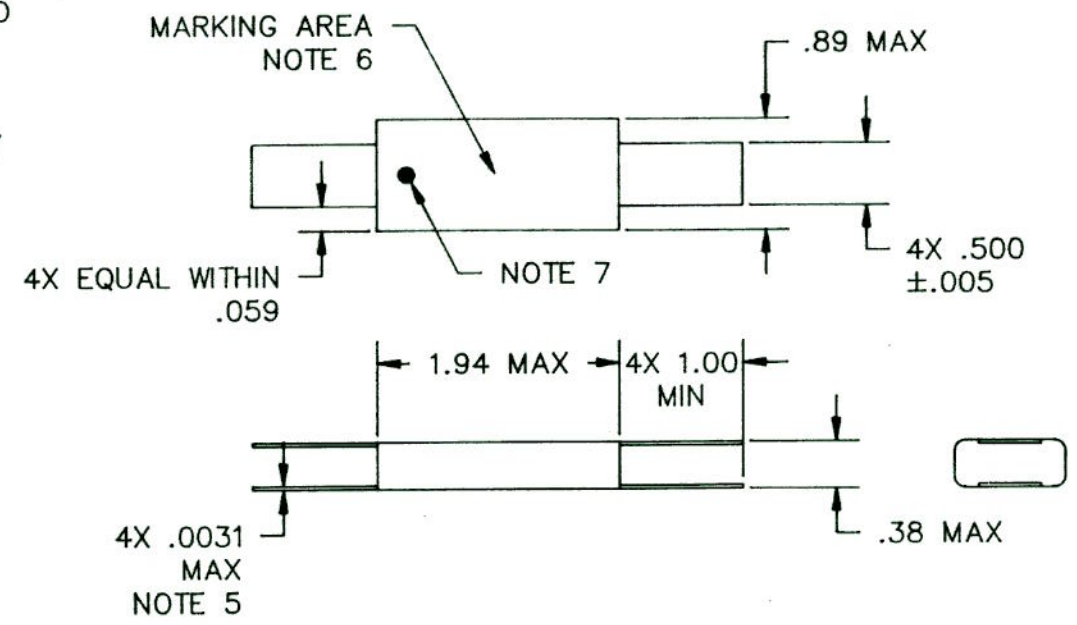

THIS IS A COMPUTER GENERATED DRAWING. ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR 12-10 93		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455			
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK N ROCK 10/02 93					
		MATERIAL		APPR D P GRAVES 10/02 93		CAPACITORS, FIXED DUAL 2X 50 nF ±10% 3500 WVDC			
		FINISH		APPR					
NEXT ASSEMBLY		USED ON		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SIZE B	CODE IDENT 7W970	DRAWING NO M104A352B001	REV A
APPLICATION						SCALE: 1 = 1			