

5

RECEIVED



JUN 24 1999

DOCUMENT CONTROL

NOTES:

- DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
- CAPACITANCE: .9 uF-1.1 uF.
- DIELECTRIC WITHSTANDING VOLTAGE:
4 kV RATED, 6 kV PROCESS FOR 2 HOURS @
100° C AND 8 kV PROOF FOR 5 SECS.
- MYLAR TAPE OVERWRAP.
- INK STAMP WITH BLACK EPOXY INK.
CHARACTERS APPROX .10 HIGH:
M105A402A000
RI 7W970
1UF ±10% 4000WVDC
DATE CODE
- EQUALLY DISTANT WITHIN
.413, BOTH ENDS.

REVISIONS			
LETTER	DESCRIPTION	DATE	APPRVD
C	REVISED PER ECO 1238. ER 645	08/20/92	DAC

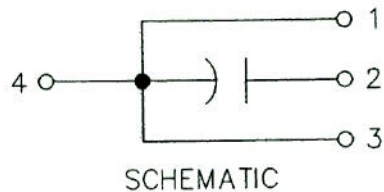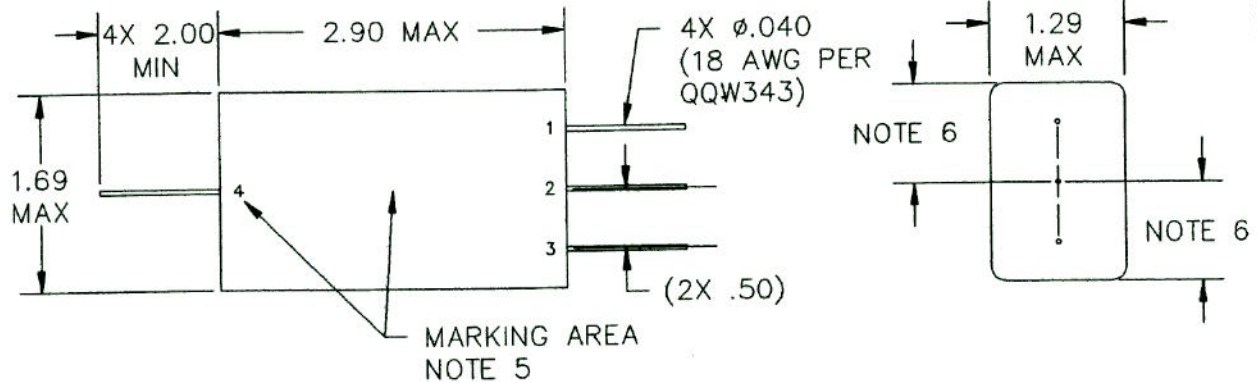

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR 08-19/92		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK N ROCK 8/20/92		CAPACITOR, FIXED	
		MATERIAL		APPR DP GRAVES 8/20/92		1 uF ±10%	
		FINISH		APPR		4000 WVDC	
NEXT ASSEMBLY		USED ON		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SIZE B CODE IDENT 7W970 DRAWING NO M105A402A000 REV C	
APPLICATION				SCALE: 1 = 1			