

RECEIVED

5


JAN 3 1998

DOCUMENT CONTROL

NOTES:

- CAPACITANCE: 180 nF-220 nF.
- DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
- DIELECTRIC WITHSTANDING VOLTAGE:  
1.0 kV RATED  
1.5 kV BURN-IN FOR 2 HRS @ 100° C  
2.0 kV PROOF FOR 5 SECONDS
- MYLAR WRAPPED, EPOXY ENCAPPED.
- INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:  
M204A102A000  
RI 7W970  
200NF ±10% 1000WVDC  
DATE CODE
- EQUALLY DISTANT WITHIN .343, BOTH ENDS.
- EQUALLY DISTANT WITHIN .114, BOTH ENDS.
- DOT INDICATES OUTSIDE FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE. ER 630	0103 98	DAC

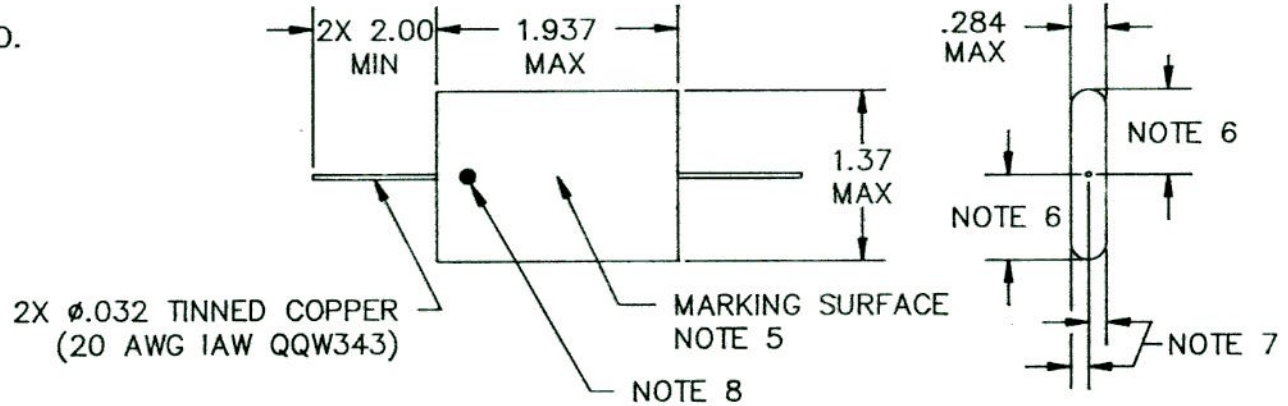

SCHEMATIC

THIS IS A COMPUTER GENERATED DRAWING. ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN N ROCK	6-8 97	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±	CHECK DAC	1023 97	CAPACITOR, RECON MICA 200nF ±10% 1000 WVDC	
		MATERIAL	APPR R. R. Kouns	10/23/97	SIZE B	CODE IDENT 7W970
		FINISH	THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		DRAWING NO M204A102A000	REV -
NEXT ASSEMBLY	USED ON			SCALE: 1 = 1		
APPLICATION						