



5

RECEIVED  
JUN 26 1996  
DOCUMENT CONTROL

NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 180 nF-220 nF.
3. DIELECTRIC WITHSTANDING VOLTAGE: 2.5 kV RATED, 3.5 kV PROCESS FOR 2 HOURS @ 100° C AND 4.5 kV PROOF FOR 5 SECS.
4. MYLAR TAPE OVERWRAP.
5. INK STAMP THE FOLLOWING WITH BLACK EPOXY INK. CHARACTERS APPROX .10 HIGH:  
M204A252B000  
RI 7W970  
200NF ±10% 2500WVDC  
DATE CODE
6. EQUALLY DISTANT WITHIN .332, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .126, BOTH ENDS.
8. BLACK DOT INDICATES OUTSIDE FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
A		REVISED PER ECO 1026 ER 618	0626 96	DAC

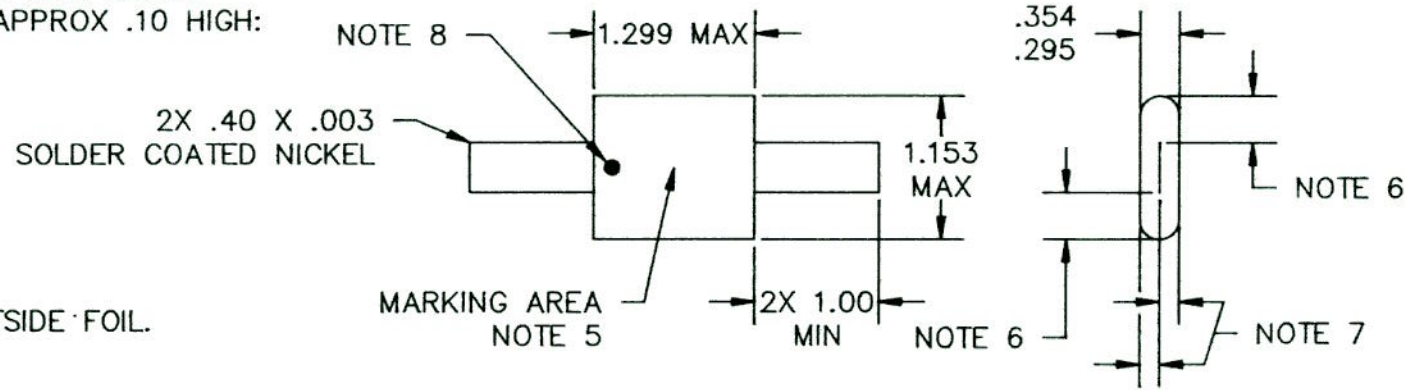

THIS IS A COMPUTER GENERATED DRAWING.  
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR	10-14 94	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455			
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK		CAPACITOR, FIXED 200 nF ±10% 2500 WVDC			
		MATERIAL		APPR		SIZE	CODE IDENT	DRAWING NO	REV
		FINISH		APPR		B	7W970	M204A252B000	A
NEXT ASSEMBLY	USED ON			THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.					
APPLICATION				SCALE: 1 = 1					