

3

RECEIVED



MAY 17 1993

DOCUMENTS CONTROL

NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 180 nF-220 nF.
2. DIELECTRIC WITHSTANDING VOLTAGE: 3 kV RATED, 4.5 kV PROCESS FOR 2 HOURS @ 100° C AND 6 kV PROOF FOR 5 SECS.
4. MYLAR TAPE OVERWRAP.
5. INK STAMP THE FOLLOWING WITH BLACK EPOXY CHARACTERS, APPROX .10 HIGH:
 M204A302A000
 RI 7W970
 200NF ±10% 3000WVDC
 DATE CODE
6. EQUALLY DISTANT WITHIN .375, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .072, BOTH ENDS.
8. DOT INDICATES OUTSIDE FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE ER 576	05/17 93	DAC

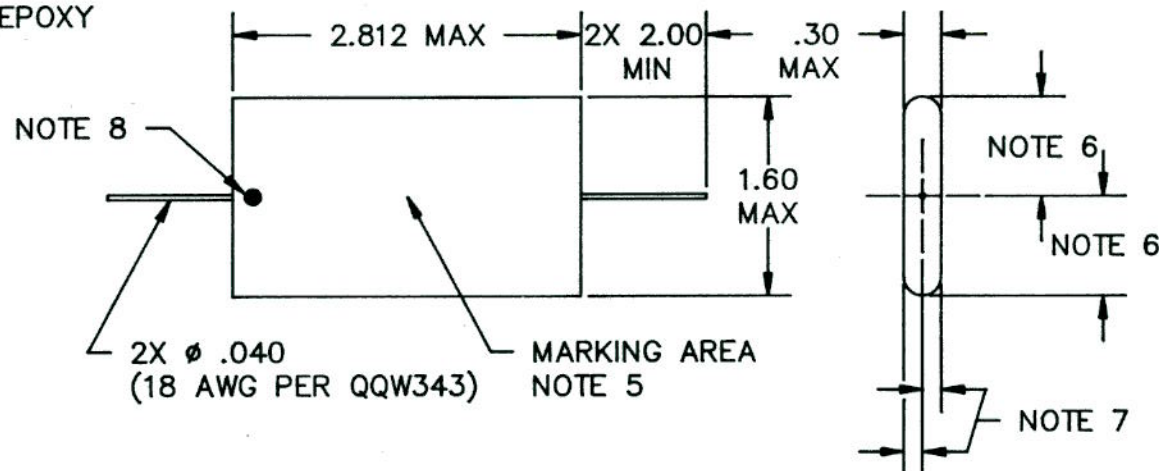

SCHEMATIC

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR 05-03 93		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX± .003		CHECK <i>M Rab</i> 4/7/93		CAPACITOR, FIXED 200 nF ±10% 3000 WVDC	
		MATERIAL		APPR <i>D J H</i> 5/6/93		DRAWING NO M204A302A000	
		FINISH		APPR		REV -	
NEXT ASSEMBLY		USED ON		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SCALE: 1 = 1	
APPLICATION				SIZE B		CODE IDENT 7W970	