

# 5

RECEIVED



JUL 17 2002

DOCUMENT CONTROL

NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 180 - 220 nF.
3. DIELECTRIC WITHSTANDING VOLTAGE:  
3.0 kV RATED  
4.5 kV BURN-IN FOR 2 HRS @ 100° C  
6.0 kV PROOF FOR 5 SECONDS
4. MYLAR WRAPPED,  
EPOXY ENDCAPPED.
5. INK STAMP THE FOLLOWING  
WITH BLACK EPOXY INK:  
M204A302B001  
RI 7W970  
200NF ±10% 3000WVDC  
DATE CODE
6. EQUALLY DISTANT WITHIN .425,  
BOTH ENDS.
7. DOT INDICATES OUTER FOIL.

REVISIONS			
LETTER	DESCRIPTION	DATE	APPRVD
-	INITIAL RELEASE ER 691	0717 02	DAC

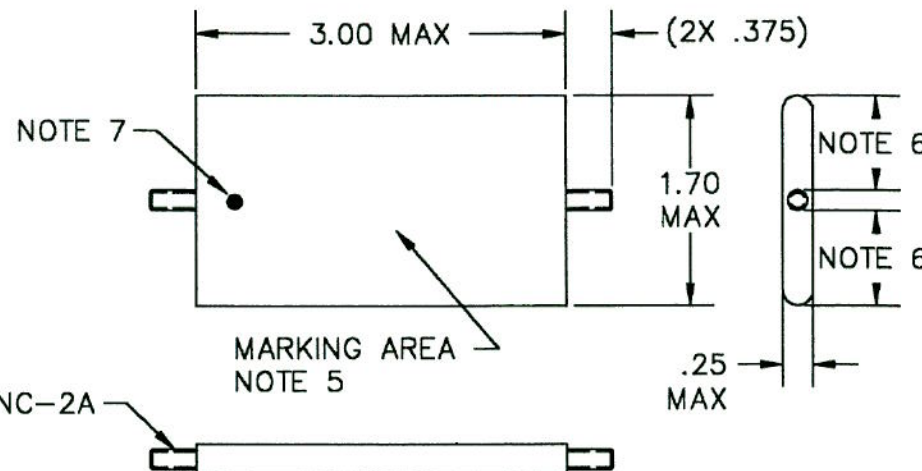

THIS IS A COMPUTER GENERATED DRAWING.  
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN N ROCK	04-16 02	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455			
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX± .003	CHECK DAC	0715 02	CAPACITOR, FIXED 200 nF ±10% 3000 WVDC			
		MATERIAL	APPR <i>R. Brown</i>	7/15/02	SIZE B	CODE IDENT 7W970	DRAWING NO M204A302B001	REV -
		FINISH	THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SCALE: 1 = 1			
NEXT ASSEMBLY	USED ON	APPLICATION						