

5

RECEIVED



AUG 16 1994

DOCUMENTS CONTROL

NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 2.7 nF-3.3 nF.
3. DIELECTRIC WITHSTANDING VOLTAGE: 5 kV RATED, 7.5 kV PROCESS FOR 2 HOURS @ 100° C AND 10 kV PROOF FOR 5 SECS.
4. MYLAR TAPE OVERWRAP.
5. INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:
M302A502A001
RI 7W970
3NF ±10% 5000WVDC
DATE CODE
6. EQUALLY DISTANT WITHIN .125, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .094, BOTH ENDS.
8. DOT INDICATES OUTSIDE FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE. ER 594	0816 94	DAC

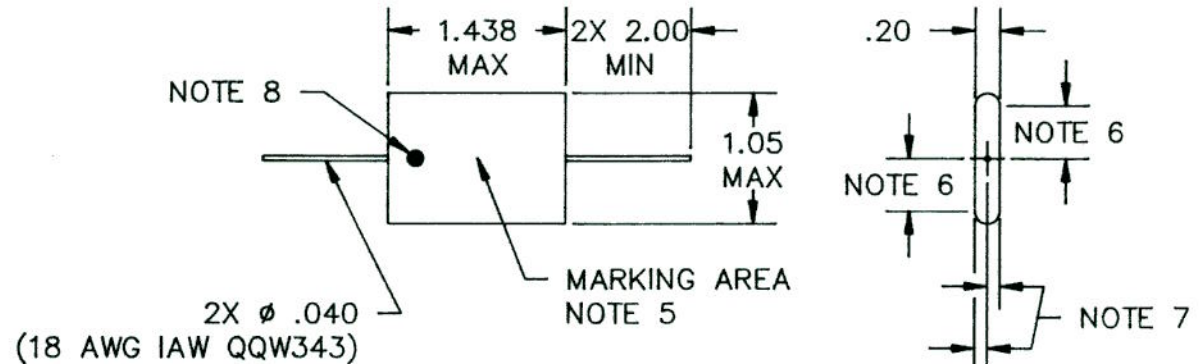

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR 08-04 94	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455		
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±.003		CHECK <i>M. J. Beck</i> 8/16/94	CAPACITOR, FIXED 3 nF ±10% 5000 WVDC		
		MATERIAL		APPR <i>D. H. G.</i> 8/16/94	SIZE CODE IDENT DRAWING NO REV B 7W970 M302A502A001 -		
		FINISH		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.			
NEXT ASSEMBLY	USED ON			SCALE: 1 = 1			
APPLICATION							