

2

RECEIVED



JUN 24 1999

DOCUMENT CONTROL

NOTES:

1. CAPACITANCE: 270 nF-330 nF.
2. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
3. DIELECTRIC WITHSTANDING VOLTAGE:
3.0 kV RATED
4.5 kV BURN-IN FOR 2 HRS @ 100° C
6.0 kV PROOF FOR 5 SECONDS
4. MYLAR WRAPPED, EPOXY ENCAPPED.
5. INK STAMPING:
M304A302A000
RI 7W970
300NF ±10% 3000WVDC
DATE CODE
6. EQUALLY DISTANT WITHIN .598, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .124, BOTH ENDS.
8. BLACK DOT INDICATES OUTER FOIL.

REVISIONS			
LETTER	DESCRIPTION	DATE	APPRVD
-	INITIAL RELEASE. ER 645	0624 99	DAC

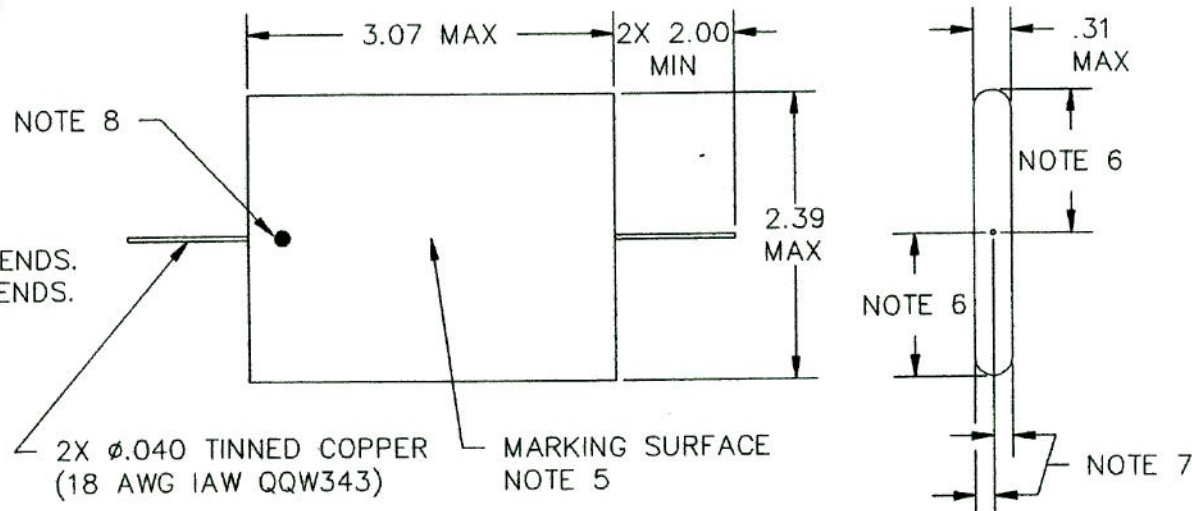

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN N ROCK 4-22 99		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK DAC 0616 99		CAPACITOR, RECON MICA 300 nF ±10% 3000 WVDC	
		MATERIAL		APPR N.R. Thoms 6/16/99		SIZE CODE IDENT DRAWING NO REV B 7W970 M304A302A000 -	
		FINISH		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SCALE: 1 = 1	
NEXT ASSEMBLY		USED ON					
APPLICATION							