


RECEIVED  
 OCT 15 1993  
 DOCUMENTS CONTROL **5**

NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 45 nF-55 nF
3. DIELECTRIC WITHSTANDING VOLTAGE: 4 kV RATED, 6 kV PROCESS FOR 2 HOURS @ 100° C AND 8 kV FOR 5 SECS.
4. MYLAR TAPE OVERWRAP.
5. INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:  
 M503A402A015  
 RI 7W970  
 50NF ±10% 4000WVDC  
 DATE CODE
6. EQUALLY DISTANT WITHIN .55, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .064, BOTH ENDS.
8. DOT INDICATES OUTSIDE FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE. ER 582	10/15/93	DAC

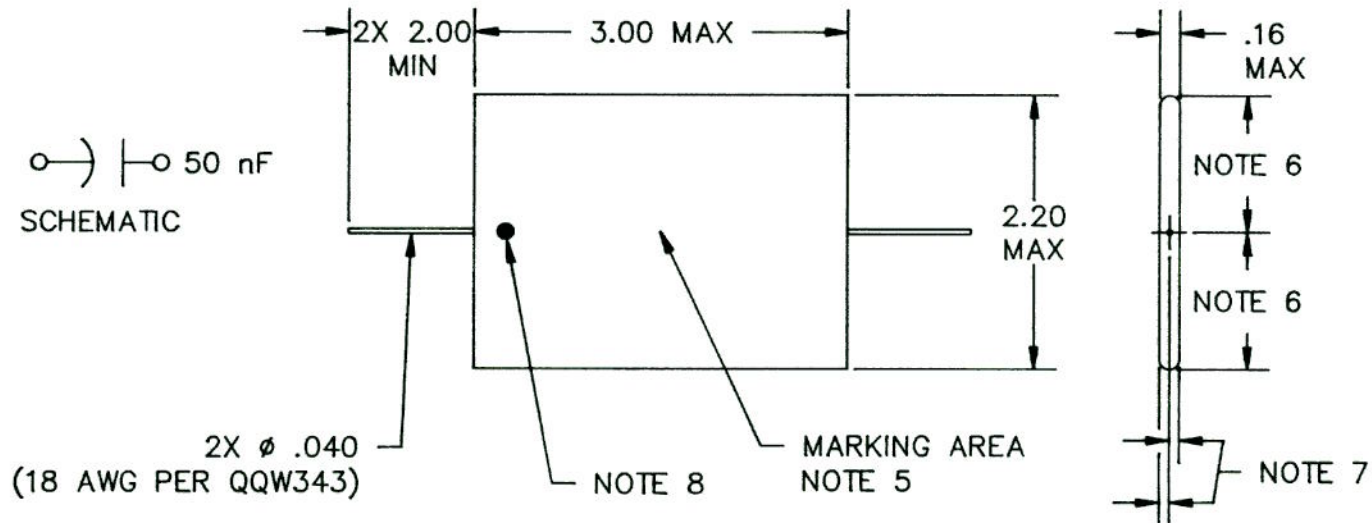

THIS IS A COMPUTER GENERATED DRAWING.  
 ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR 09-30 93		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK <i>[Signature]</i> 10/1/93		CAPACITOR, FIXED	
		MATERIAL		APPR <i>[Signature]</i> 10/1/93		50 nF ±10%	
		FINISH		APPR		4000 WVDC	
NEXT ASSEMBLY		USED ON		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SIZE B	CODE IDENT 7W970
APPLICATION						DRAWING NO M503A402A015	REV -
						SCALE: 1 = 1	