

5


RECEIVED

AUG 26 2003


DOCUMENT CONTROL

NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 450 – 550 nF.
3. DIELECTRIC WITHSTANDING VOLTAGE:
3.50 kV RATED
5.25 kV BURN-IN FOR 2 HRS @ 100° C
7.00 kV PROOF FOR 5 SECONDS
4. MYLAR TAPE OVERWRAP,
EPOXY ENDCAPPED.
5. INK STAMP THE FOLLOWING WITH
BLACK EPOXY INK. CHARACTERS
APPROX .10 HIGH:
M504A352A000
RI 7W970
500NF ±10% 3500WVDC
DATE CODE
6. EQUALLY DISTANT WITHIN
.575, BOTH ENDS.
7. EQUALLY DISTANT WITHIN
.224, BOTH ENDS.
8. DOT INDICATES OUTSIDE FOIL.



REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE. ER 710	0826 03	DAC

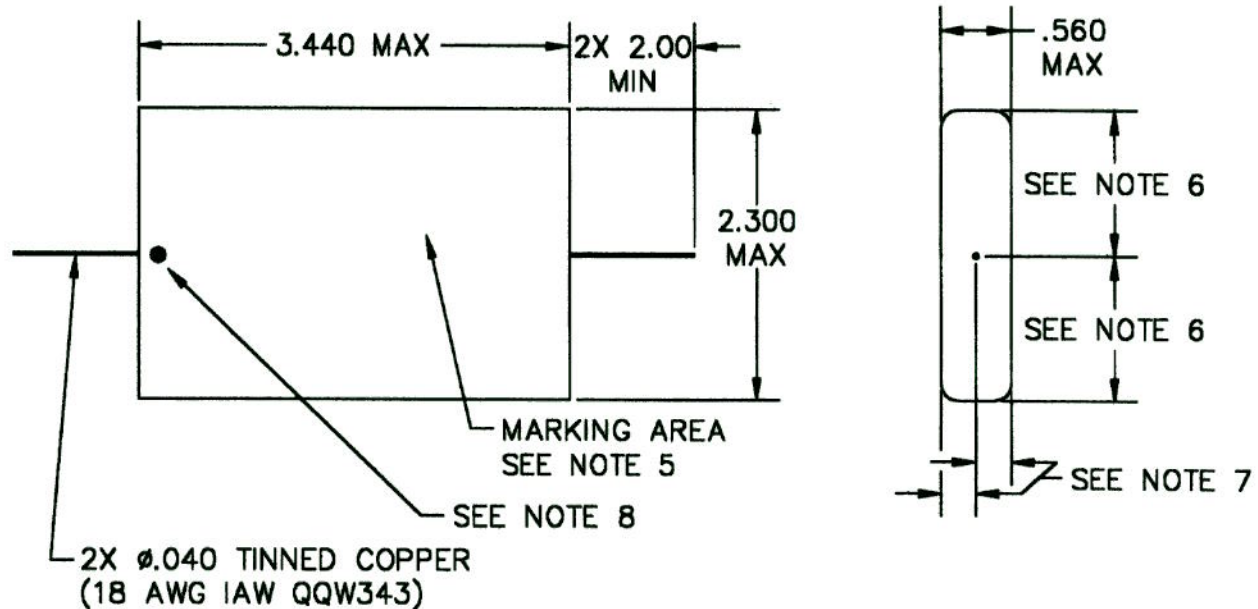

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN N ROCK 06-13 03		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455			
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK DAC 0728 03					
		MATERIAL		APPR <i>A.N. Thomas</i> 7/28/03		CAPACITOR, RECON MICA 500 nF ±10% 3500 WVDC			
		FINISH		APPR					
NEXT ASSEMBLY		USED ON		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SIZE B	CODE IDENT 7W970	DRAWING NO M504A352A000	REV -
APPLICATION						SCALE: 1 = 1			