

5


RECEIVED

JUL 13 2000


DOCUMENT CONTROL

NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 kHz.
2. CAPACITANCE: 540 nF-660 nF.
3. DIELECTRIC WITHSTANDING VOLTAGE:
4 kV RATED
6 kV BURN-IN FOR 2 HRS @ 100° C
8 kV PROOF FOR 5 SECONDS
4. MYLAR WRAPPED EPOXY ENCAPPED.
5. INK STAMPING:
M604A402B000
RI 7W970
600NF ±10% 4000WVDC
DATE CODE
6. TEMPERATURE RANGE:
-40° C TO +125° C
7. ESL: <20 nH
8. DOT INDICATES OUTER FOIL.



FUNCTIONAL
DIAGRAM

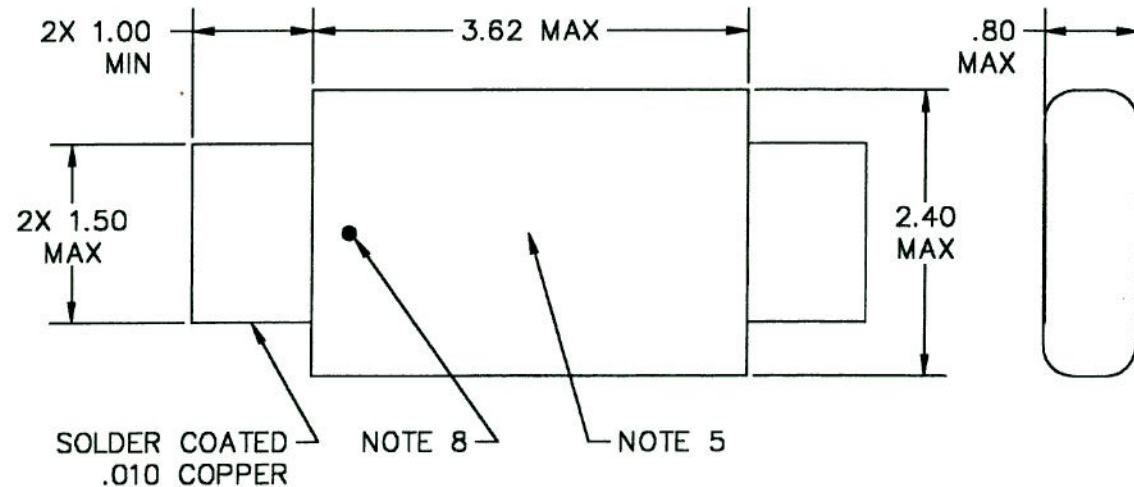

REVISIONS			
LETTER	DESCRIPTION	DATE	APPRD
-	INITIAL RELEASE. ER 661	0714 00	DAC

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN N ROCK	01-10 00	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±	CHECK DAC	0627 00	CAPACITOR, RECON MICA 600 nF ±10% 4000 WVDC	
		MATERIAL	APPR R.R. Kama 6/27/00			
		FINISH	THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.			SIZE B
NEXT ASSEMBLY	USED ON			CODE IDENT 7W970	DRAWING NO M604A402B000	REV -
APPLICATION				SCALE: 1 = 1		