

# 5



RE VED  
DEC 22 1993

DOCUMENT CONTROL

**NOTES:**

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 7.2 uF-8.8 uF.
3. DIELECTRIC WITHSTANDING VOLTAGE: 600 V RATED, 900 V PROCESS FOR 2 HOURS @ 100° C AND 1200 V FOR 5 SECS.
4. MYLAR TAPE OVERWRAP.
5. INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:  
M805A601A000  
RI 7W970  
8UF ±10% 600WVDC  
DATE CODE
6. EQUALLY DISTANT WITHIN 1.00, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .48, BOTH ENDS.
8. DOT INDICATES OUTER FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE. ER 585	12/20/93	DAC

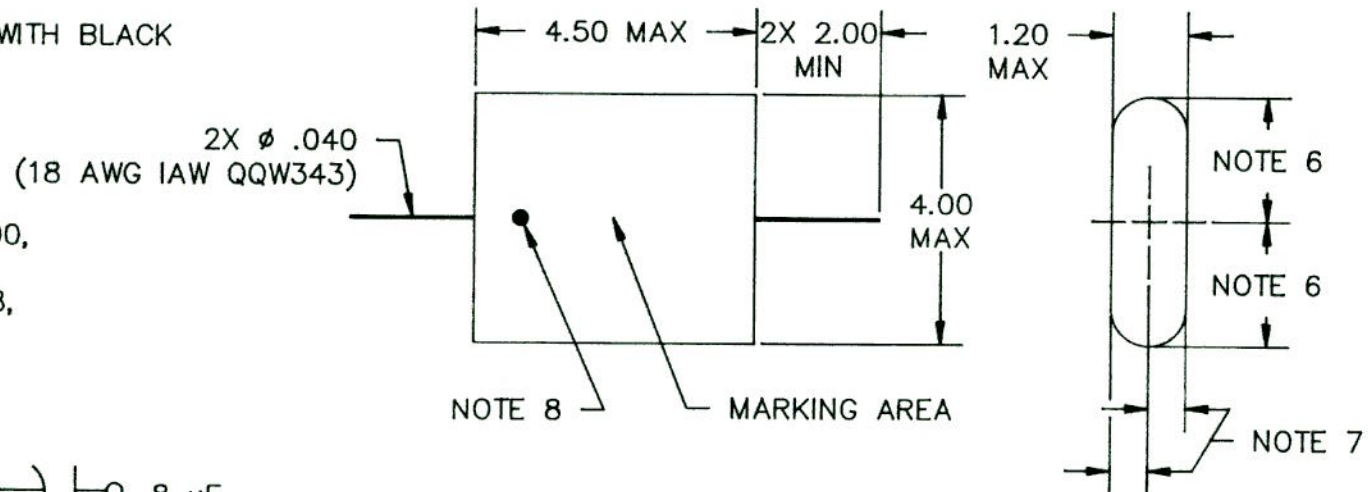

THIS IS A COMPUTER GENERATED DRAWING.  
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR 12-14 93		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX± .003		CHECK <i>N. Beck</i> 12/17/93		CAPACITOR, FIXED	
		MATERIAL		APPR <i>D. J. P. G.</i> 12/11/93		8 uF ±10%	
		FINISH		APPR		600 WVDC	
NEXT ASSEMBLY		USED ON		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SIZE CODE IDENT DRAWING NO REV	
APPLICATION				B 7W970 M805A601A000 -		SCALE: 1 = 2	