

# 5

RECEIVED



APR 23 1997

DOCUMENT CONTROL

**NOTES:**

- CAPACITANCE: 9 nF-11 nF.
- DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
- DIELECTRIC WITHSTANDING VOLTAGE:  
1.2 kV RATED  
1.8 kV BURN-IN FOR 2 HOURS @ 100° C  
2.4 kV PROOF FOR 5 SECONDS
- UNWRAPPED, GRIT BLAST FINISH.
- INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:  
U103A122A000  
RI 7W970  
10NF ±10% 1200WVDC  
DATE CODE
- DOT INDICATES OUTSIDE FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE. ER 626	0423 97	DAC

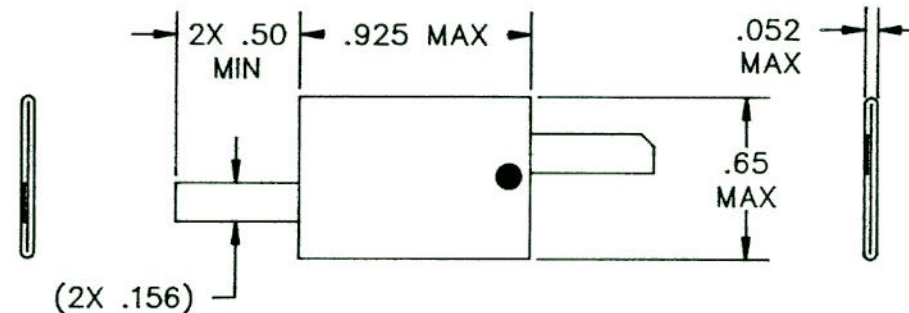

SCHEMATIC

THIS IS A COMPUTER GENERATED DRAWING.  
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN N ROCK 12-10 96		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455					
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK DAC 0402 97		CAPACITOR, RECON MICA 10nF ±10% 1200WVDC					
		MATERIAL		APPR A.R. Reynolds 4/3/97							
		FINISH		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SIZE B		CODE IDENT 7W970		DRAWING NO U103A122A000	
NEXT ASSEMBLY		USED ON				REV -					
APPLICATION						SCALE: 2 = 1					