



4

RECEIVED  
 JUN 26 1996  
 DOCUMENT CONTROL

NOTES:

- DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
- CAPACITANCE: 90 nF-110 nF.
- DIELECTRIC WITHSTANDING VOLTAGE: 3 kV RATED, 4.2 kV PROCESS FOR 2 HOURS @ 100° C AND 5.6 kV PROOF FOR 5 SECS.
- RAW SECTION (INTENDED FOR CONFORMAL COATING, OR EMBEDMENT, PRIOR TO USE.).
- EQUAL WITHIN .24.
- INK STAMP THE FOLLOWING WITH BLACK EPOXY INK. CHARACTERS APPROX .10 HIGH:  
 U104A302B002  
 RI 7W970  
 100NF ±10% 3000WVDC  
 DATE CODE
- DOT INDICATES OUTER FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
C		REVISED PER ECO 1031 ER 618	0626 96	DAC

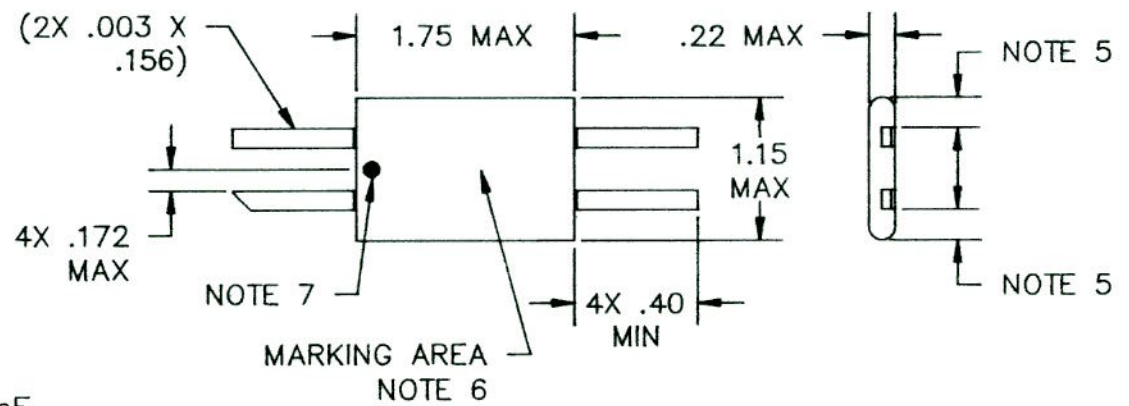

THIS IS A COMPUTER GENERATED DRAWING.  
 ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN D CADENA JR 01-06 95	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±	CHECK N ROCK 2/16 95	CAPACITOR, FIXED 100 nF ±10% 3000 WVDC	
		MATERIAL	APPR	SIZE B	
		FINISH	APPR	CODE IDENT 7W970	DRAWING NO U104A302B002
NEXT ASSEMBLY	USED ON		REV C		
APPLICATION			SCALE: 1 = 1		

THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.