


5

RECEIVED
DEC 11 2002
DOCUMENT CONTROL

NOTES:

1. CAPACITANCE: 225 nF - 275 nF.
2. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
3. DIELECTRIC WITHSTANDING VOLTAGE:
 3.0 kV RATED
 4.5 kV BURN-IN FOR 2 HRS @ 100° C
 6.0 kV PROOF FOR 5 SECONDS
4. EPOXY ENCAPPED, UNWRAPPED,
 GRIT BLAST FINISH.
5. INK MARKING:
 U254A302A000
 7W970
 250NF ±10% 3000WVDC
 DATE CODE
6. EQUALLY DISTANT WITHIN .443, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .126, BOTH ENDS.
8. DOT INDICATES OUTER FOIL.

REVISIONS		DATE	APPRVD
LETTER	NO	DESCRIPTION	
-		INITIAL RELEASE. ER 697	12/11/02 DAC

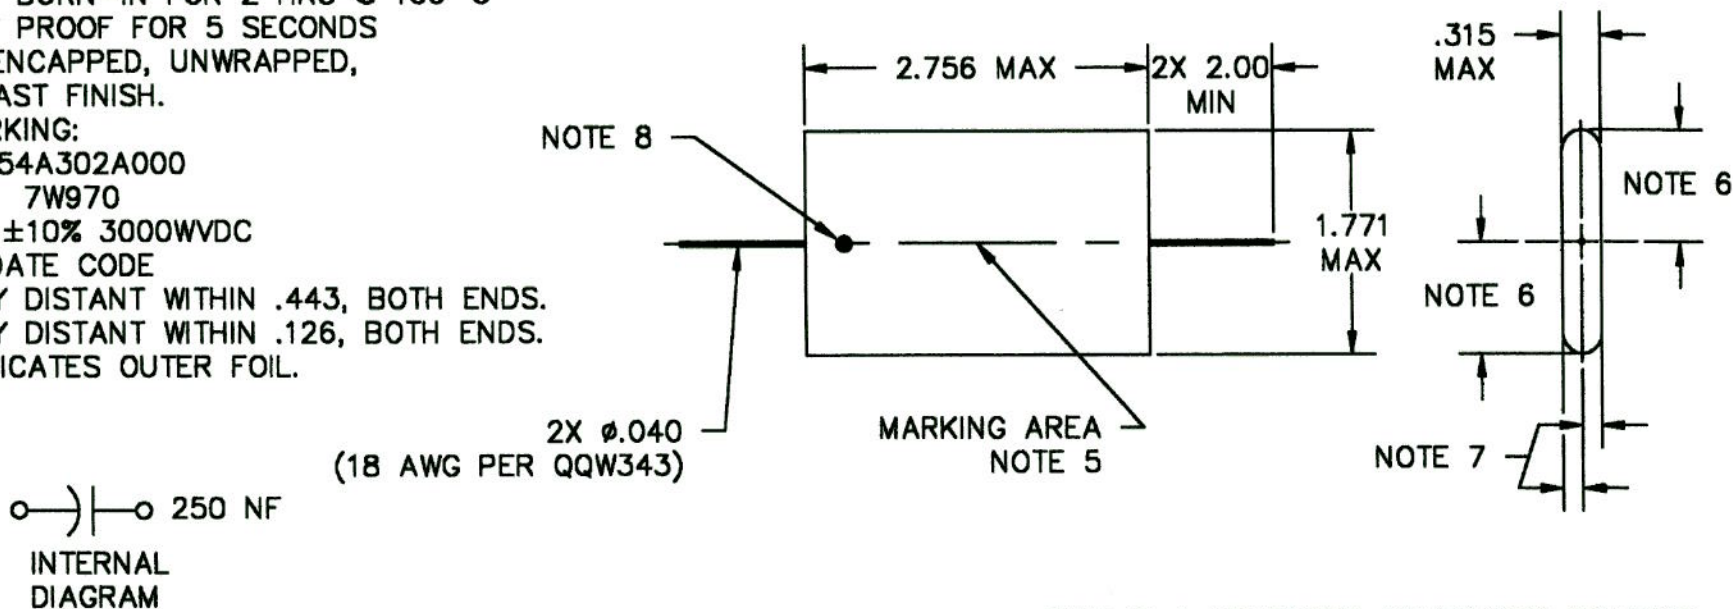

THIS IS A COMPUTER GENERATED DRAWING.
 ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR 7-23 02		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX± .003		CHECK		CAPACITOR, FIXED 250 NF ±10% 3000 WVDC	
		MATERIAL		APPR <i>D. T. Thomas</i> 11/25/02		DRAWING NO	
		FINISH		APPR		REV	
NEXT ASSEMBLY		USED ON		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		B 7W970 U254A302A000 -	
APPLICATION				SCALE: 1 = 1			