

4

RECEIVED



OCT 22 2002

DOCUMENT CONTROL

NOTES:

1. CAPACITANCE: 225 nF - 275 nF.
2. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
3. DIELECTRIC WITHSTANDING VOLTAGE:
 - 4 kV RATED
 - 6 kV BURN-IN FOR 2 HRS @ 100° C
 - 8 kV PROOF FOR 5 SECONDS
4. EPOXY ENCAPPED, UNWRAPPED, GRIT BLAST FINISH.
5. INK MARKING:
 - U254A402A000
 - RI 7W970
 - 250NF ±10% 4000WVDC
 - DATE CODE
6. EQUALLY DISTANT WITHIN .404, BOTH ENDS.
7. EQUALLY DISTANT WITHIN .294, BOTH ENDS.
8. DOT INDICATES OUTER FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE. ER 696	1022 02	DAC

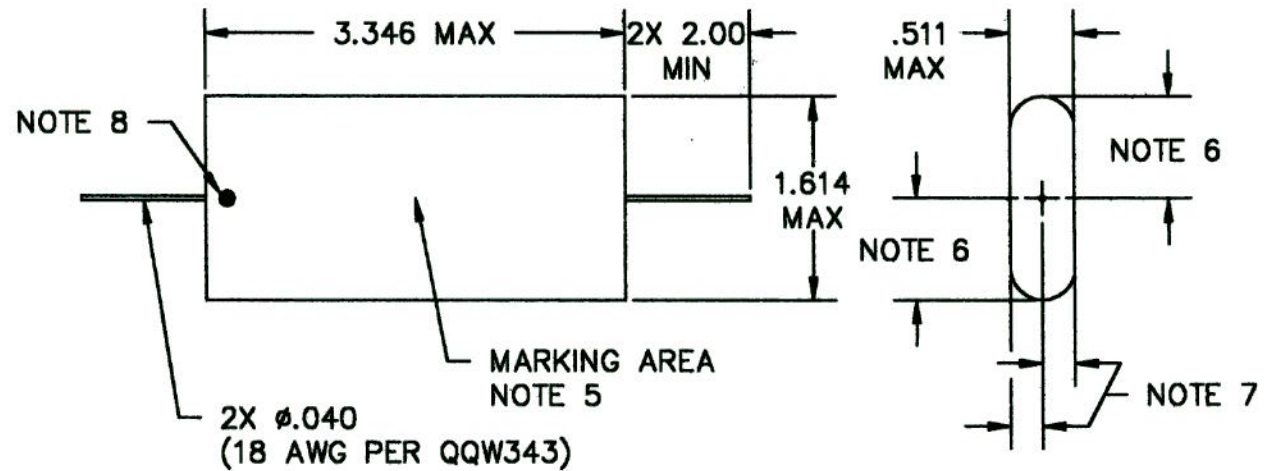

INTERNAL DIAGRAM

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR 7-24 2002		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX± .003		CHECK DAC 1018 02		CAPACITOR, RECON MICA 250 nF ±10% 4000 WVDC	
		MATERIAL		APPR R. N. K... 10/18/02		SIZE CODE IDENT DRAWING NO REV B 7W970 U254A402A000 -	
		FINISH		APPR		SCALE: 1 = 1	
NEXT ASSEMBLY USED ON				THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.			
APPLICATION							