

5

RECEIVED


OCT 23 1996

DOCUMENT CONTROL

NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 384 nF MINIMUM.
3. DIELECTRIC WITHSTANDING VOLTAGE: 4.5 kV RATED, 5.4 kV PROCESS FOR 2 HOURS @ 100° C AND 7.2 kV PROOF FOR 5 SECS.
4. UNWRAPPED, NATURAL FINISH SECTIONS.
5. BAG AND TAG THE FOLLOWING:
U384E452B000
RI 7W970
384NF MIN 4500WVDC
DATE CODE
6. TABS SOLDERED WITH SN96.
7. DOT INDICATES OUTER FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE. ER 021	1023 96	DAC

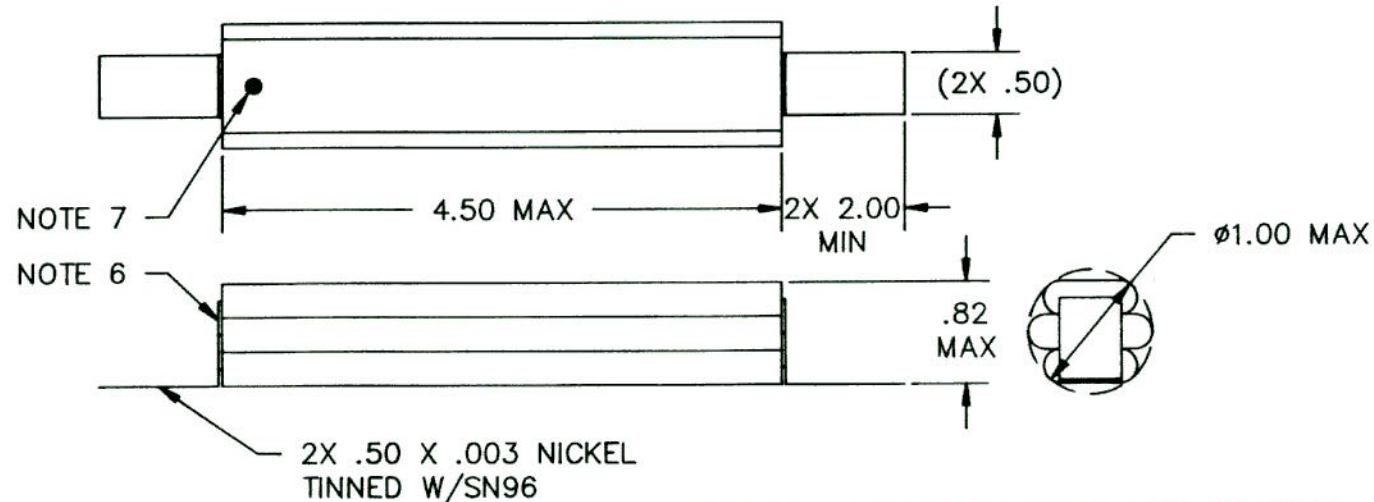

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN D CADENA JR	09-12 96	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455			
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±	CHECK <i>M. R. ...</i>	9/30/96	CAPACITOR, FIXED 384 nF MIN 4500 WVDC			
		MATERIAL	APPR <i>A. R. ...</i>	9/27/96	SIZE	CODE IDENT	DRAWING NO	REV
		FINISH	THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		B	7W970	U384E452B000	-
NEXT ASSEMBLY	USED ON				SCALE: 1 = 1			
APPLICATION								