



RECEIVED
 APR 23 1997
 DOCUMENT CONTROL

5

NOTES:

- CAPACITANCE: 42.3 nF-51.7 nF.
- DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
- DIELECTRIC WITHSTANDING VOLTAGE:
 2.5 kV RATED
 3.75 kV BURN-IN FOR 2 HOURS @ 100° C
 5.0 kV PROOF FOR 5 SECONDS
- UNWRAPPED, GRIT BLAST FINISH.
- INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:
 U473A252A000
 RI 7W970
 47NF ±10% 2500WVDC
 DATE CODE
- EQUALLY DISTANT WITHIN .40, BOTH ENDS.
- WIDE TAB INDICATES OUTSIDE FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE ER 626	0423 97	DAC

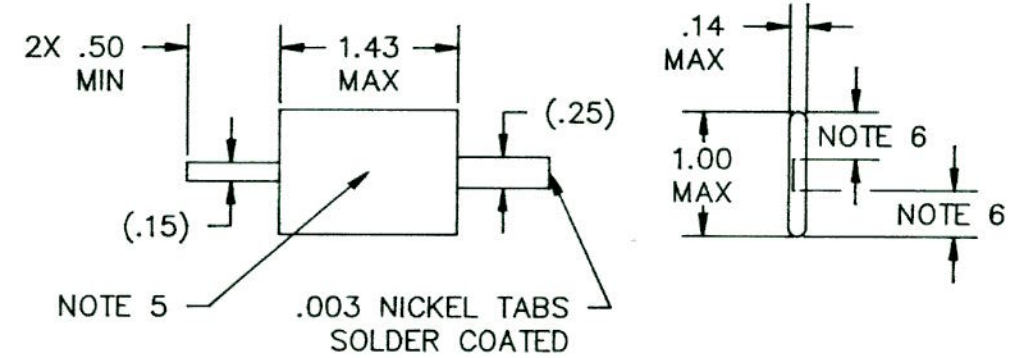

THIS IS A COMPUTER GENERATED DRAWING.
 ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN N ROCK 12-10 96		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455			
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK DAC 0402 97		CAPACITOR, RECON MICA 47nF ±10% 2500 WVDC			
		MATERIAL		APPR A.R. Rouns 4/2/97					
		FINISH		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SIZE B	CODE IDENT 7W970	DRAWING NO U473A252A000	REV -
NEXT ASSEMBLY	USED ON					SCALE: 1 = 1			
APPLICATION									