

4

RECEIVED



DEC 11 2002

DOCUMENT CONTROL

NOTES:

1. CAPACITANCE: 450 - 550 nF.
2. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
3. DIELECTRIC WITHSTANDING VOLTAGE:
4 kV RATED
6 kV BURN-IN FOR 2 HRS @ 100° C
8 kV PROOF FOR 10 SECONDS
4. UNWRAPPED SECTION, GRIT BLAST FINISH.
5. INK MARKING:
U504A402A000
RI 7W970
500NF ±10% 4000WVDC
DATE CODE
6. DOT INDICATES OUTER FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE ER 697	12/11/02	DAC

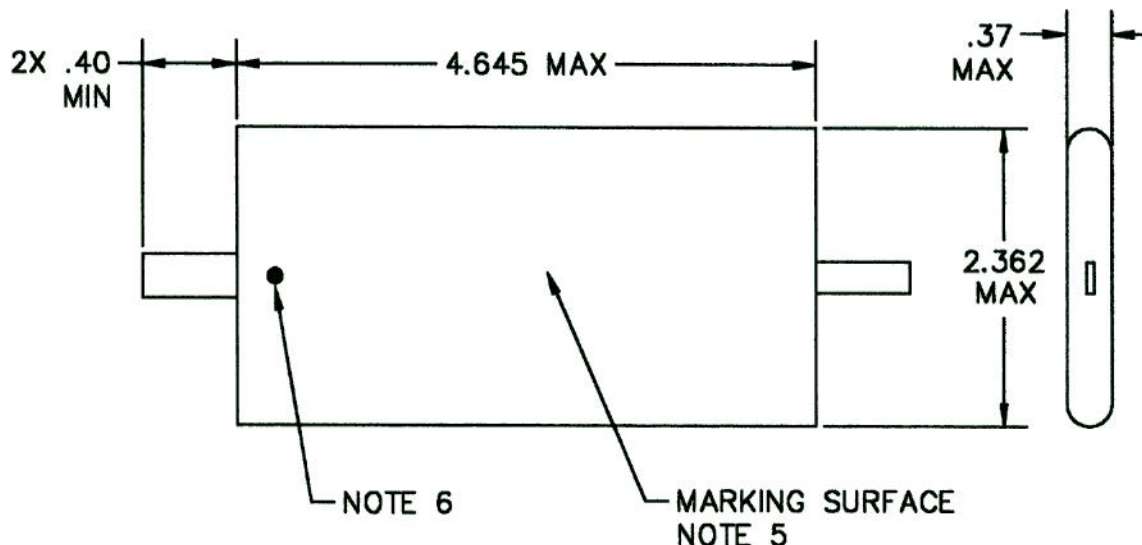

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN N. ROCK 9-3 2001		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK DAC 12/11/02		CAPACITOR, RECON MICA 500nF ±10% 4000 WVDC	
		MATERIAL		APPR R. N. Korman 12/10/02		SIZE CODE IDENT DRAWING NO REV	
		FINISH		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		B 7W970 U504A402A000 -	
NEXT ASSEMBLY		USED ON		SCALE: 1 = 1			
APPLICATION							