

RECEIVED

MAR 24 1997


5

DOCUMENT CONTROL

NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 kHz.
2. CAPACITANCE: 72 nF MIN
3. DIELECTRIC WITHSTANDING VOLTAGE: 3.75 kV RATED,
4.4 kV PROCESS FOR 2 HOURS @ 100° C AND
5.8 kV PROOF FOR 5 SECS.
4. RAW SECTION, NO OVERWRAP.
5. BAG AND TAG THE FOLLOWING:
U753A382B000
RI 7W970
72NF MIN 3.75KVDC
DATE CODE
6. DOT INDICATES OUTER FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
A		REVISED PER ECO 1085 ER 625	0324 97	DAC

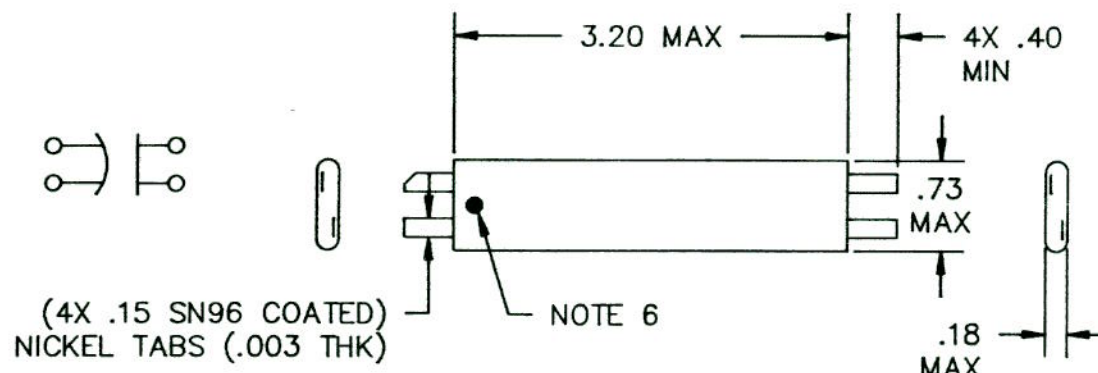

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR	07-17 96	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455			
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK N ROCK	7/30 96				
		MATERIAL		APPR		CAPACITOR, FIXED 72 nF MIN 3750 WVDC			
		FINISH		APPR					
NEXT ASSEMBLY	USED ON			THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		SIZE B	CODE IDENT 7W970	DRAWING NO U753A382B000	REV A
APPLICATION						SCALE: 1 = 1			