


NOTES:

1. CAPACITANCE: 80 nF MINIMUM.
2. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
3. DIELECTRIC WITHSTANDING VOLTAGE:
2.5 kV RATED
3.0 kV BURN-IN FOR 2 HRS @ 90° C
4.0 kV PROOF FOR 5 SECONDS
4. UNWRAPPED, GRIT BLAST FINISH.
5. INK MARKING:
U803E252R000
RI 7W970
80NF MIN 2.5KV
DATE CODE
6. DOT INDICATES OUTSIDE FOIL.

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE ER 630	0103 98	DAC

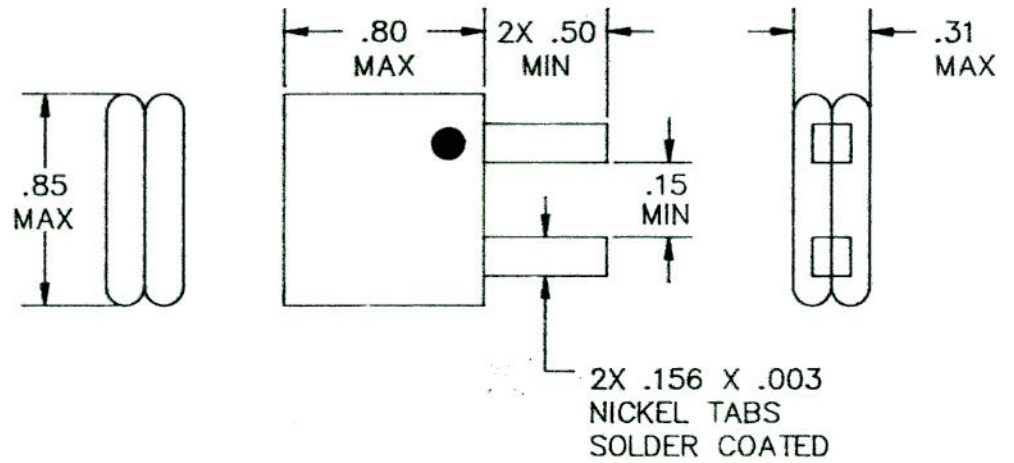

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN N ROCK 8-20 97		REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455	
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		CHECK DAC 12-17 97		CAPACITOR, RECON MICA 80nF MIN 2500 WVDC	
		MATERIAL		APPR <i>R. N. Hours</i> 12/17/97		DRAWING NO U803E252R000	
		FINISH		APPR		REV -	
NEXT ASSEMBLY		USED ON		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		CODE IDENT B 7W970	
APPLICATION				SCALE: 2 = 1			