

5

RECEIVED
SEP 27 1994


DOCUMENT CONTROL

NOTES:

1. DISSIPATION FACTOR: .005 MAX @ 25° C, 1 KHZ.
2. CAPACITANCE: 90 nF MIN.
3. DIELECTRIC WITHSTANDING VOLTAGE: 3 kV RATED, AND 3.5 kV PROOF FOR 15 SECS.
4. RAW SECTION, NO OVERWRAP.
5. INK STAMP THE FOLLOWING WITH BLACK EPOXY INK:

U903E302B000
RI 7W970
90NF MIN 3000WVDC
DATE CODE

REVISIONS				
LETTER	NO	DESCRIPTION	DATE	APPRVD
-		INITIAL RELEASE. ER 596	0927 94	DAC

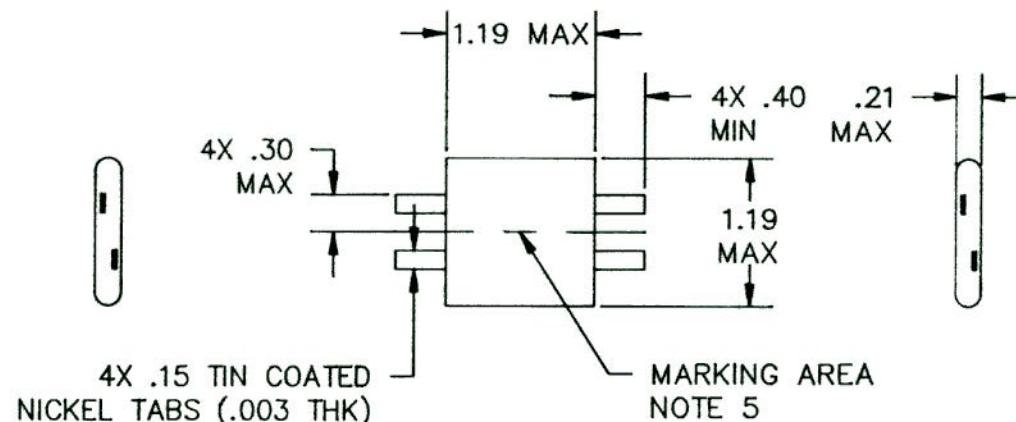

THIS IS A COMPUTER GENERATED DRAWING.
ALL CHANGES ARE MADE BY COMPUTER ONLY.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D CADENA JR. 08-24 94 CHECK <i>N.R. Ruch</i> 9/12/94 APPR <i>D.P. Gm</i> 9/12/94 APPR	REYNOLDS INDUSTRIES, INC. 3070 SKYWAY DR BLDG 301 SANTA MARIA, CA 93455		
		TOLERANCES FRACTIONS ± ANGLES ± DECIMALS .XX± DECIMALS .XXX±		THIS DOCUMENT, THE DRAWINGS AND TECHNICAL DATA CONTAINED HEREON ARE THE PROPERTY OF REYNOLDS INDUSTRIES INC. REPRODUCTION OR DISSEMINATION IN ANY FORM, EXCEPT AS EXPRESSLY AUTHORIZED BY THE OWNER, IS FORBIDDEN. THE HOLDER AGREES TO RETURN THIS DOCUMENT TO THE OWNER ON DEMAND.		CAPACITOR, FIXED 90 nF MIN 3000 WVDC	
		MATERIAL		SIZE	CODE IDENT	DRAWING NO	REV
		FINISH		B	7W970	U903E302B000	-
NEXT ASSEMBLY	USED ON			SCALE: 1 = 1			
APPLICATION							